

## Description

The AP65450 is an adaptive constant on-time mode synchronous buck converter providing high efficiency, excellent transient response and high DC output accuracy for low-voltage regulation in digital TV and monitor.


The constant-on-time control scheme handles wide input/output voltage ratios and provides low external component count. The internal proprietary circuit enables the device to adopt both low equivalent series resistance (ESR) output capacitors, such as SP-CAP or POSCAP and ultra-low ESR ceramic capacitors.

The adaptive on-time control supports seamless transition between continuous conduction mode (CCM) at higher load conditions and discontinuous conduction mode (DCM) at lighter load conditions.

DCM allows AP65450 to maintain high efficiency at light load conditions. The AP65450 also features programmable soft-start, UVLO, OTP and OCP to protect the circuit.

This IC is available in SO-8EP package.

## Pin Assignments

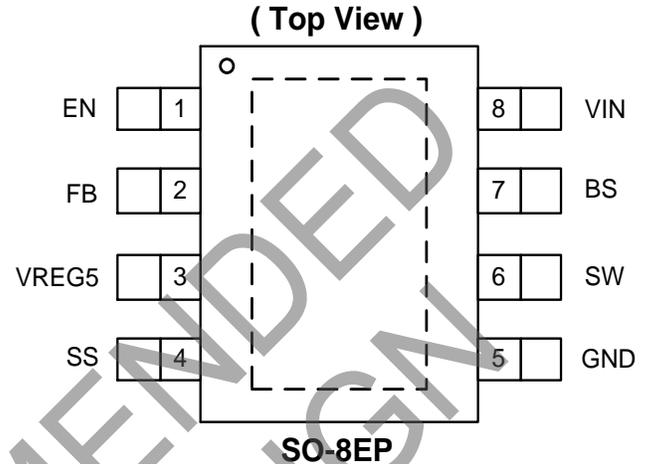

## Features

- Fixed Frequency Emulated Constant On-time Control
- Good Stability Independent of the Output Capacitor ESR
- Fast Load Transient Response
- Synchronous Rectification: 65mΩ Internal High-side Switch and 36mΩ Internal Low-side Switch
- Wide Input Voltage Range: 4.5V to 18V
- Output Voltage Range: 0.76V to 6V
- 4A Continuous Output Current
- 650kHz Switching Frequency
- Built-in Over Current Limit
- Built-in Thermal Shutdown Protection
- Programmable Soft-start
- Pre-biased Start-up
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**

## Applications

- Gaming Consoles
- Flat Screen TV Sets and Monitors
- Set-Top Boxes
- Distributed power systems
- Home Audio
- Consumer Electronics
- Network Systems
- FPGA, DSP and ASIC Supplies
- Green Electronics

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
  2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

## Typical Applications Circuit

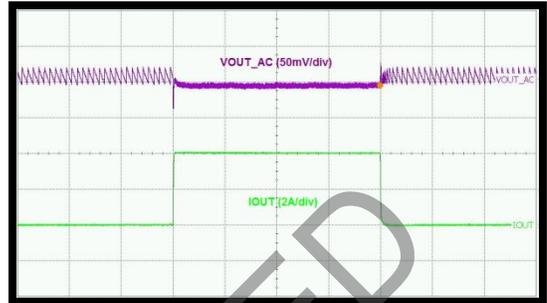
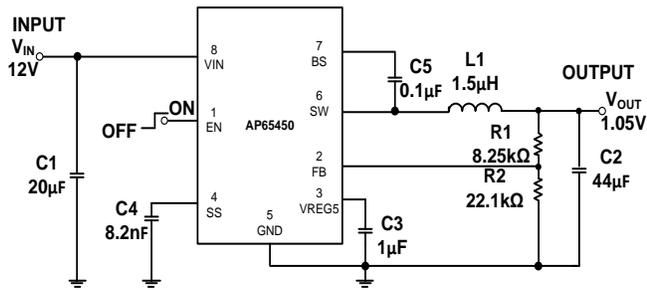


Figure 1. Typical Application Circuit

## Pin Descriptions

| Pin Name | Pin Number<br>SO-8EP | Function  |
|----------|----------------------|---|
| EN       | 1                    | Enable input. EN is a digital input that turns the regulator on or off. Drive EN high to turn on the regulator, drive it low to turn off. Pull up with 100kΩ resistor for automatic startup.  |
| FB       | 2                    | Feedback Input. FB senses the output voltage and regulates it. Drive FB with a resistive voltage divider connected to it from the output voltage.   |
| VREG5    | 3                    | Internal power supply output pin to connect an additional capacitor. Connect a 1µF (typical) capacitor as close as possible to the VREG5 and GND. This pin is not active when EN is low.  |
| SS       | 4                    | Soft-start control input pin. SS controls the soft start period. Connect a capacitor from SS to GND to set the soft-start period.   |
| GND      | 5                    | Ground pin is the main power ground for the switching circuit.  |
| SW       | 6                    | Power Switching Output. SW is the switching node that supplies power to the output. Connect the output LC filter from SW to the output load. Note that a capacitor is required from SW to BS to power the high-side switch.         |
| BS       | 7                    | Bootstrap pin. A bootstrap capacitor is connected between the BS pin and SW pin. The voltage across the bootstrap capacitor drives the internal high-side NMOS switch. A 0.1µF (typical) capacitor is required for proper operation |
| VIN      | 8                    | Supply input pin. A capacitor should be connected between the VIN pin and GND pin to keep the DC input voltage constant.  |
| EP       | —                    | Connect the exposed thermal pad to GND on the PCB.  |

**Functional Block Diagram**

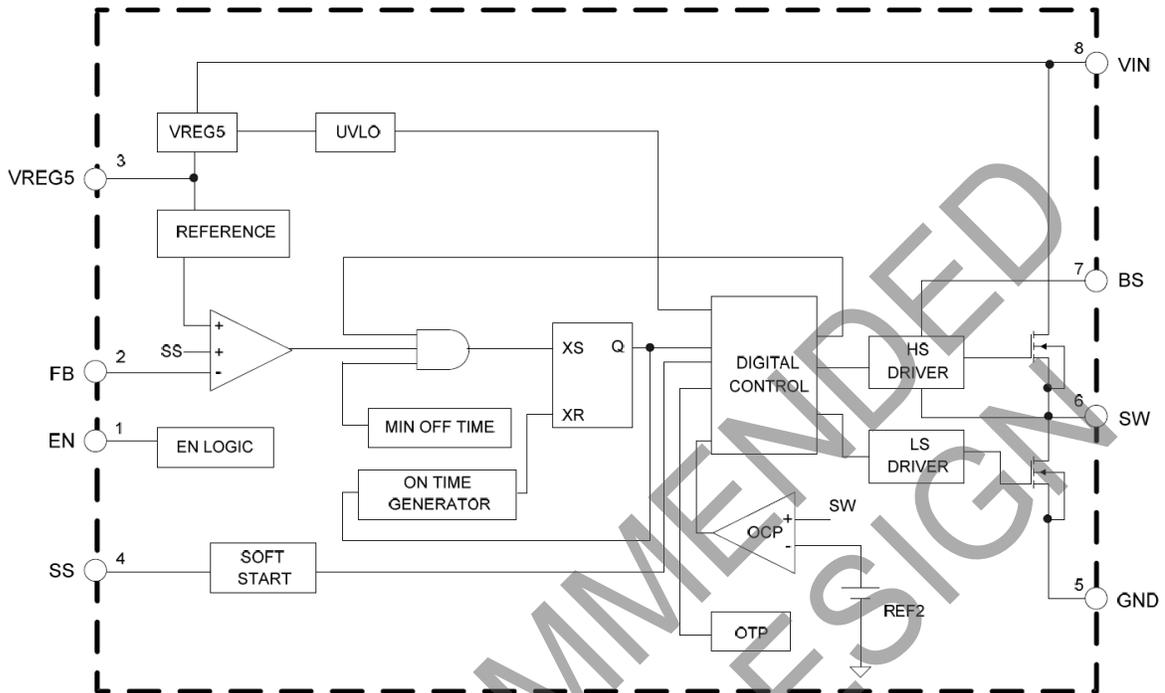


Figure 2. Functional Block Diagram

**Absolute Maximum Ratings** (Note 4) (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Symbol                             | Parameter            | Rating                       | Unit |
|------------------------------------|----------------------|------------------------------|------|
| V <sub>IN</sub>                    | Supply Voltage       | -0.3 to 20                   | V    |
| V <sub>REG5</sub>                  | VREG5 Pin Voltage    | -0.3V to +6.0                | V    |
| V <sub>SW</sub>                    | Switch Node Voltage  | -1.0 to V <sub>IN</sub> +0.3 | V    |
| V <sub>BS</sub>                    | Bootstrap Voltage    | -0.3 to V <sub>SW</sub> +6.0 | V    |
| V <sub>FB</sub>                    | Feedback Voltage     | -0.3V to +6.0                | V    |
| V <sub>EN</sub>                    | Enable/UVLO Voltage  | -0.3V to +6.0                | V    |
| V <sub>SS</sub>                    | Soft-start PIN       | -0.3V to +6.0                | V    |
| V <sub>GND</sub>                   | GND Pin Voltage      | -0.3 to 0.3                  | V    |
| T <sub>ST</sub>                    | Storage Temperature  | -65 to +150                  | °C   |
| T <sub>J</sub>                     | Junction Temperature | +160                         | °C   |
| T <sub>L</sub>                     | Lead Temperature     | +260                         | °C   |
| <b>ESD Susceptibility (Note 5)</b> |                      |                              |      |
| HBM                                | Human Body Model     | 2                            | kV   |
| MM                                 | Machine Model        | 200                          | V    |

Notes: 4. Stresses greater than the 'Absolute Maximum Ratings' specified above can cause permanent damage to the device. These are stress ratings only; functional operation of the device at these or any other conditions exceeding those indicated in this specification is not implied. Device reliability can be affected by exposure to absolute maximum rating conditions for extended periods of time.  
5. Semiconductor devices are ESD sensitive and may be damaged by exposure to ESD events. Suitable ESD precautions should be taken when handling and transporting these devices.

---

**Thermal Resistance** (Note 6)
 

---

| Symbol        | Parameter           | Rating |    | Unit                        |
|---------------|---------------------|--------|----|-----------------------------|
|               |                     | SO-8EP |    |                             |
| $\theta_{JA}$ | Junction to Ambient | SO-8EP | 70 | $^{\circ}\text{C}/\text{W}$ |
| $\theta_{JC}$ | Junction to Case    | SO-8EP | 30 | $^{\circ}\text{C}/\text{W}$ |

Note: 6. Test condition: SO-8EP: Device mounted on 1"x1" FR-4 substrate PCB, 2oz copper, with minimum recommended pad layout.

---

**Recommended Operating Conditions** (Note 7) (@ $T_A = +25^{\circ}\text{C}$ , unless otherwise specified.)
 

---

| Symbol | Parameter                            | Min      | Max            | Unit               |
|--------|--------------------------------------|----------|----------------|--------------------|
|        |                                      | $V_{IN}$ | Supply Voltage |                    |
| $T_J$  | Operating Junction Temperature Range | -40      | +125           | $^{\circ}\text{C}$ |
| $T_A$  | Operating Ambient Temperature Range  | -40      | +85            | $^{\circ}\text{C}$ |







Note: 7. The device function is not guaranteed outside of the recommended operating conditions.

NOT RECOMMENDED FOR NEW DESIGN







**Electrical Characteristics** (@T<sub>A</sub> = +25°C, V<sub>IN</sub> = 12V, unless otherwise specified.)

| Parameter                         | Symbol                    | Conditions   | Min   | Typ   | Max   | Unit |
|-----------------------------------|---------------------------|--|-------|-------|-------|------|
| <b>SUPPLY VOLTAGE (VIN PIN)</b>   |                           |  |       |       |       |      |
| Input Voltage                     | V <sub>IN</sub>           | —  | 4.5   | —     | 18    | V    |
| Quiescent Current                 | I <sub>Q</sub>            | V <sub>FB</sub> =0.85V                                 | —     | 0.9   | —     | mA   |
| Shutdown Supply Current           | I <sub>SHDN</sub>         | V <sub>EN</sub> =0V                                    | —     | 3.6   | 10    | μA   |
| <b>UNDER VOLTAGE LOCKOUT</b>      |                           |  |       |       |       |      |
| UVLO Threshold                    | V <sub>UVLO</sub>         | V <sub>IN</sub> Rising Test V <sub>REG5</sub> Voltage  | 3.45  | 3.75  | 4.05  | V    |
| UVLO Hysteresis                   | V <sub>HYS</sub>          | V <sub>IN</sub> Falling Test V <sub>REG5</sub> Voltage | 0.19  | 0.32  | 0.45  | V    |
| <b>ENABLE (EN PIN)</b>            |                           |  |       |       |       |      |
| EN High-level Input Voltage       | V <sub>ENH</sub>          | —  | 1.9   | —     | —     | V    |
| EN Low-level Input Voltage        | V <sub>ENL</sub>          | —  | —     | —     | 0.6   | V    |
| <b>VOLTAGE REFERENCE (FB PIN)</b> |                           |  |       |       |       |      |
| Feedback Voltage                  | V <sub>FB</sub>           | V <sub>OUT</sub> =1.05V                                | 0.753 | 0.765 | 0.777 | V    |
| Feedback Bias Current             | I <sub>FB</sub>           | V <sub>FB</sub> =0.8V                                  | -0.1  | 0     | 0.1   | μA   |
| <b>VREG5 OUTPUT</b>               |                           |  |       |       |       |      |
| VREG5 Output Voltage              | V <sub>VREG5</sub>        | 6.0V<V <sub>IN</sub> <18V<br>0<I <sub>VREG5</sub> <5mA | 4.7   | 5.1   | 5.5   | V    |
| Source Current Capability         | —                         | V <sub>IN</sub> =6V, V <sub>VREG5</sub> =4V            | —     | 110   | —     | mA   |
| Load Regulation                   | —                         | 0<I <sub>VREG5</sub> <5mA                              | —     | —     | 60    | mV   |
| Line Regulation                   | —                         | 6.0V<V <sub>IN</sub> <18V I <sub>VREG5</sub> =5mA      | —     | —     | 20    | mV   |
| <b>MOSFET</b>                     |                           |  |       |       |       |      |
| High-side Switch On-resistance    | R <sub>DSOH</sub>         | —  | —     | 0.075 | —     | Ω    |
| Low-side Switch On-resistance     | R <sub>DSOL</sub>         | —  | —     | 0.036 | —     | Ω    |
| <b>CURRENT LIMIT</b>              |                           |  |       |       |       |      |
| High Level Current Limit          | I <sub>LIM-H</sub>        | L=1.5μH  | 4.6   | 5.6   | 6.9   | A    |
| <b>ON-TIME TIMER</b>              |                           |  |       |       |       |      |
| On Time                           | t <sub>ON</sub>           | V <sub>IN</sub> =12V, V <sub>OUT</sub> =1.05V          | —     | 150   | —     | ns   |
| Minimum Off Time                  | t <sub>OFF-MIN</sub>      | V <sub>FB</sub> =0.7V                                  | —     | 260   | 310   | ns   |
| <b>THERMAL SHUTDOWN</b>           |                           |  |       |       |       |      |
| Thermal Shutdown                  | T <sub>OTSD</sub>         | —  | —     | +160  | —     | °C   |
| Thermal Shutdown Hysteresis       | T <sub>HYS</sub>          | —  | —     | +30   | —     | °C   |
| <b>SOFT START (SS PIN)</b>        |                           |  |       |       |       |      |
| Soft-start Source Current         | I <sub>SS-SOURCE</sub>    | V <sub>SS</sub> =1.2V                                  | 4.2   | 6.0   | 7.8   | μA   |
| Soft-start Discharge Current      | I <sub>SS-DISCHARGE</sub> | V <sub>SS</sub> =0.5V                                  | 0.1   | 0.2   | —     | mA   |


**Typical Performance Characteristics** (@ $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 12\text{V}$ ,  $V_{OUT} = 3.3\text{V}$ , unless otherwise specified)

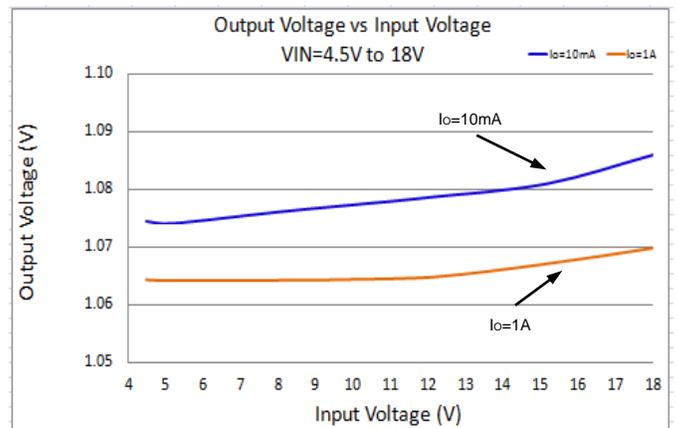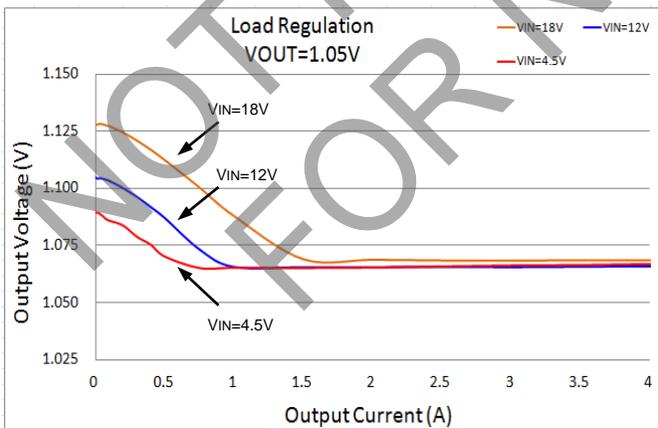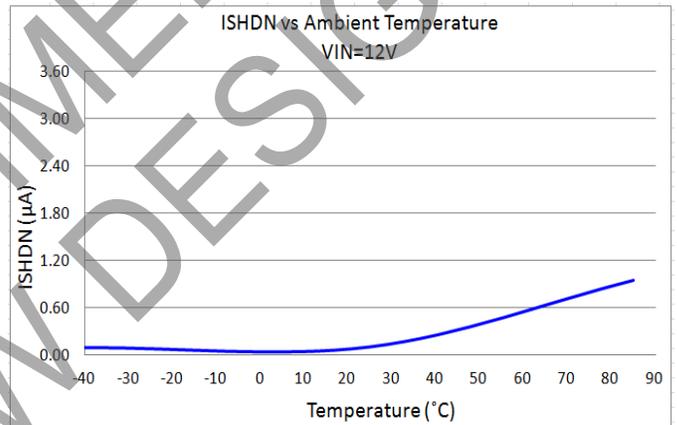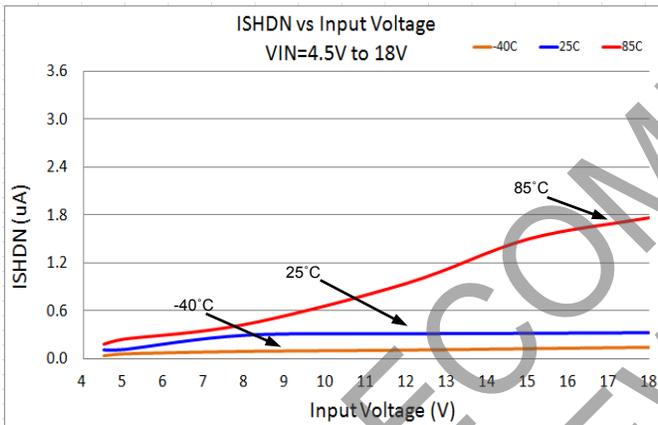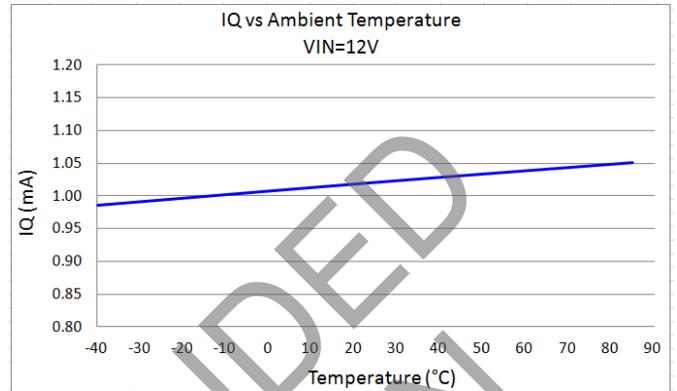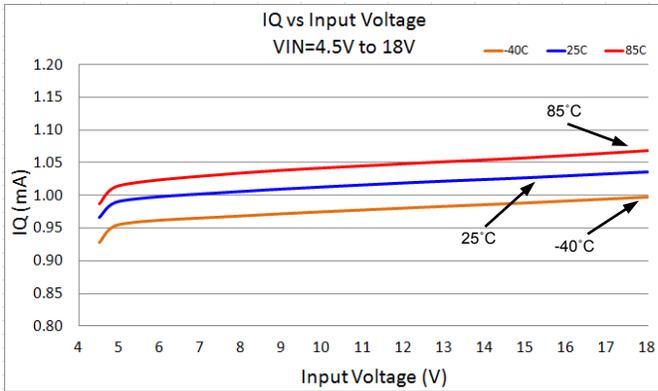


**Typical Performance Characteristics** (continued) (@T<sub>A</sub> = +25°C, V<sub>IN</sub> = 12V, V<sub>OUT</sub> = 1.05V, unless otherwise specified.)

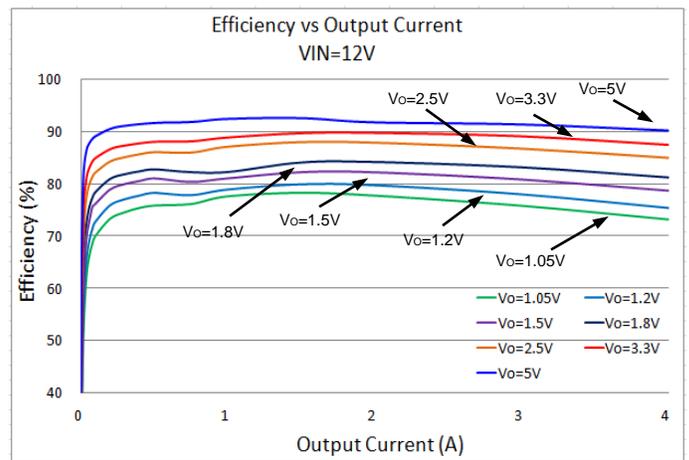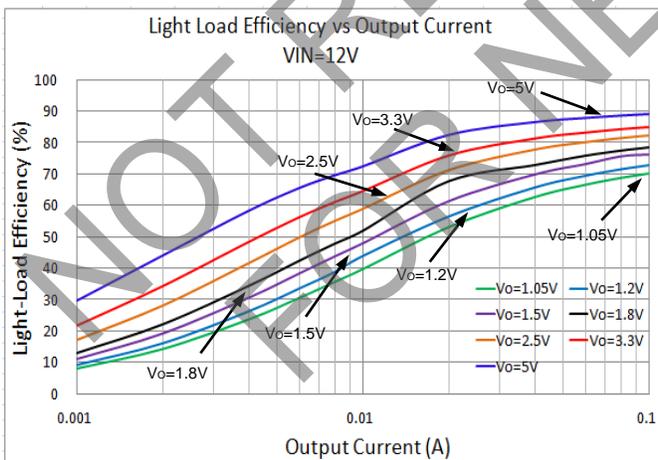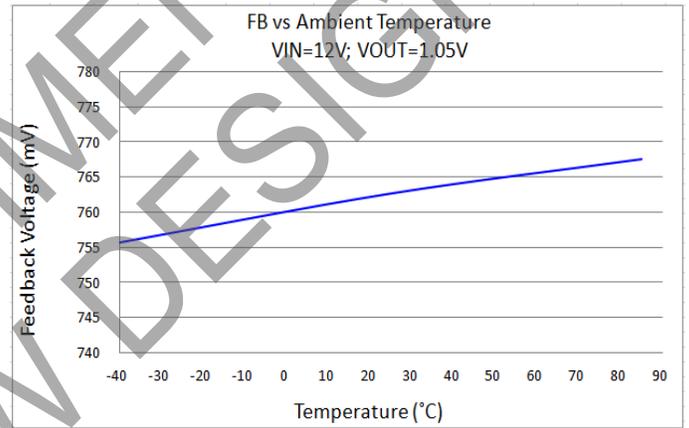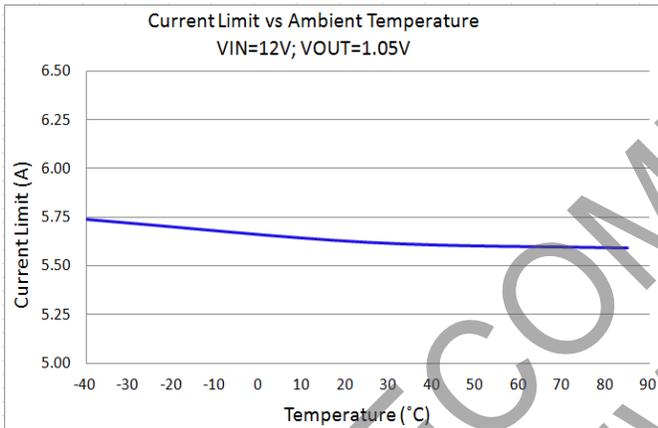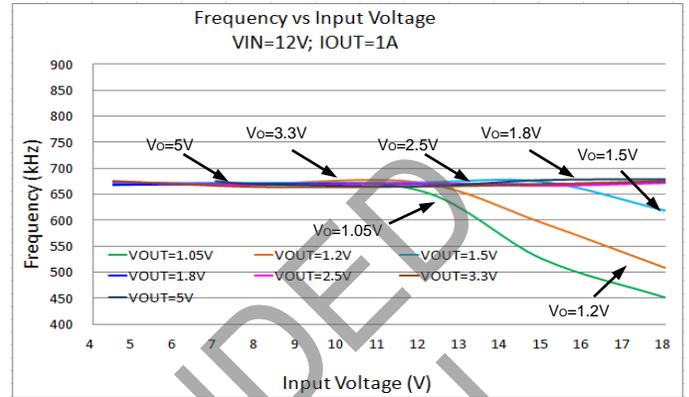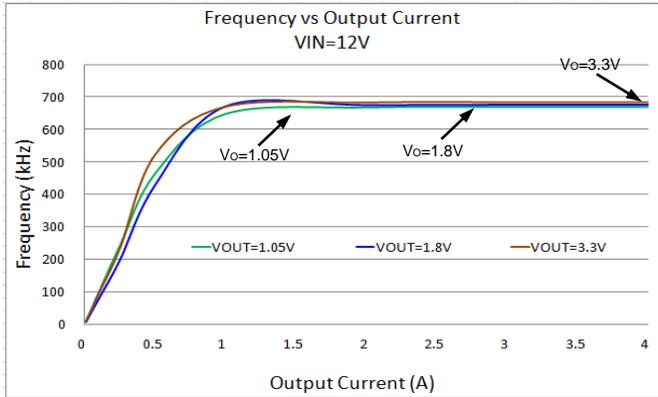


**Typical Performance Characteristics** (continued) (@ $T_A = +25^\circ\text{C}$ ,  $V_{IN} = 12\text{V}$ ,  $V_{OUT} = 1.05\text{V}$ ,  $L = 1.5\mu\text{H}$ ,  $C_1 = 20\mu\text{F}$ ,  $C_2 = 44\mu\text{F}$ , unless otherwise specified.)

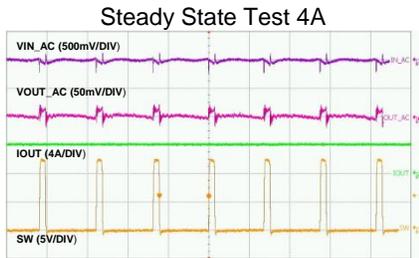


Time-1 $\mu\text{s}/\text{div}$

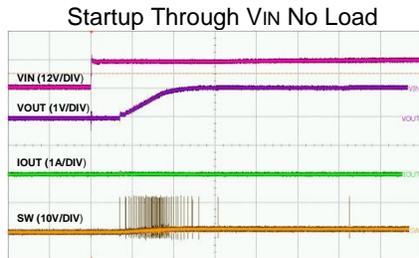


Time-500 $\mu\text{s}/\text{div}$

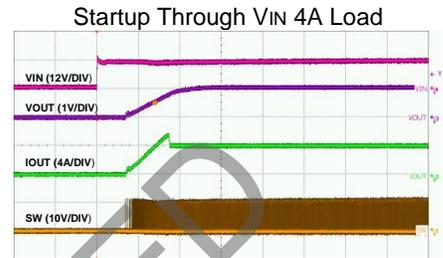


Time-500 $\mu\text{s}/\text{div}$

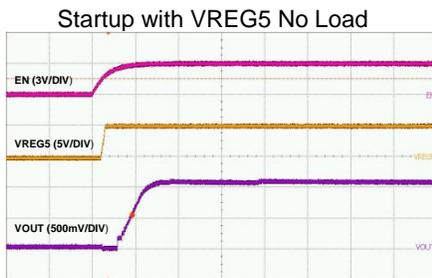


Time-1ms/div

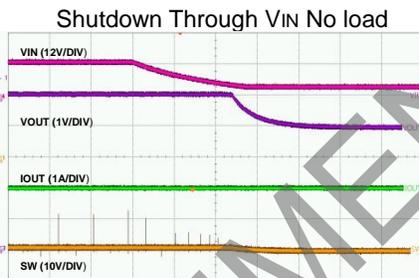


Time-50ms/div

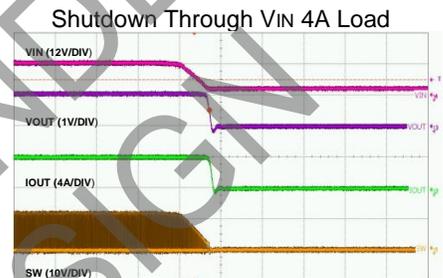


Time-200 $\mu\text{s}/\text{div}$

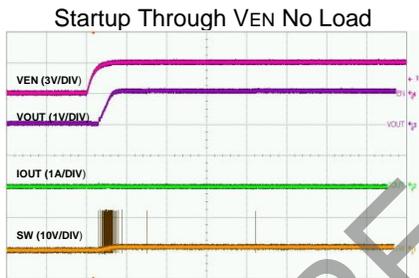


Time-2ms/div

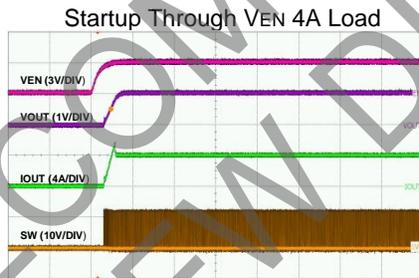


Time-2ms/div

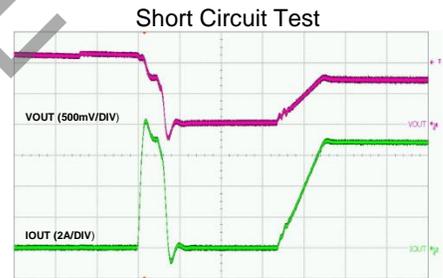


Time-100 $\mu\text{s}/\text{div}$

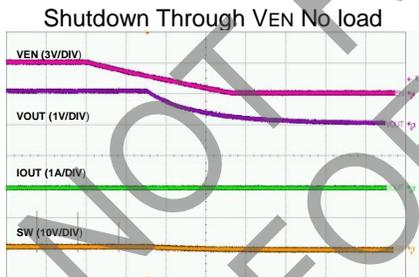


Time-20ms/div

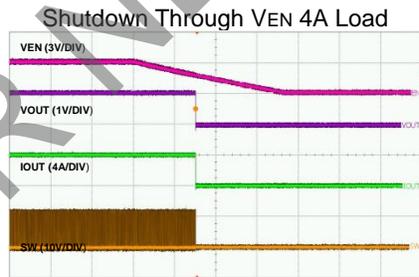


Time-20ms/div

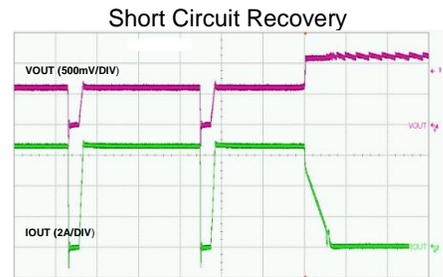


Time-1ms/div

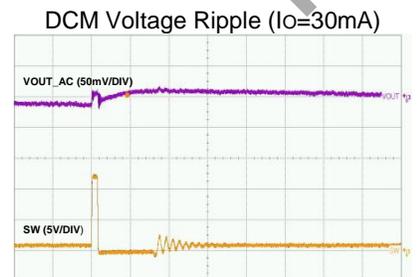

Time-1 $\mu\text{s}/\text{div}$

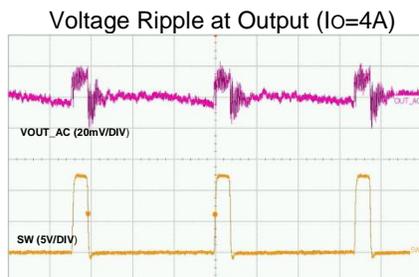

Time-400ns/div

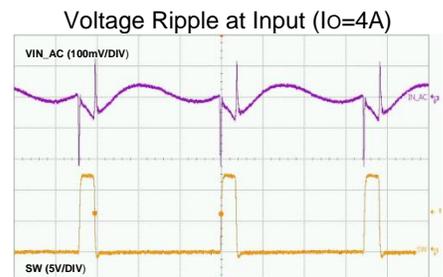

Time-400ns/div

## Application Information

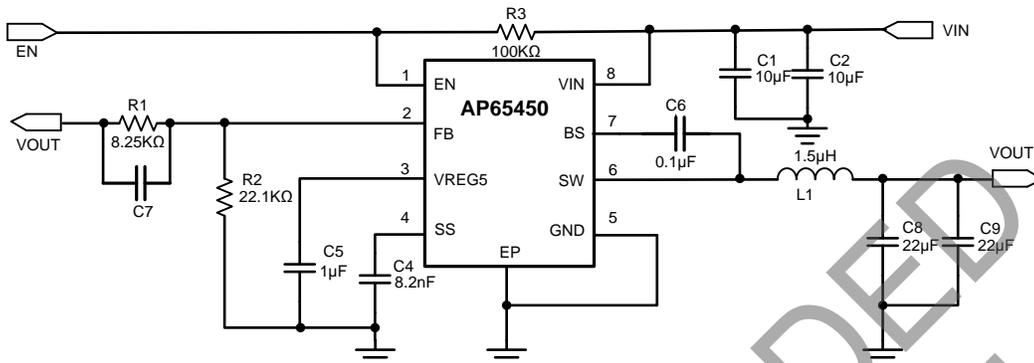


Figure 3. Typical Application of AP65450

### PWM Operation and Adaptive On-time Control

The AP65450 is synchronous step-down converters with internal power MOSFETs. Adaptive constant on time (COT) control is employed to provide fast transient response and easy loop stabilization. At the beginning of each cycle, the high-side MOSFET is turned on. This MOSFET is turned off after internal one shot timer expires. This one shot is set by the converter input voltage ( $V_{IN}$ ), and the output voltage ( $V_{OUT}$ ) to maintain a pseudo-fixed frequency over the input voltage range, hence it is called adaptive on-time control. The output voltage variation is sensed by FB voltage. The one-shot timer is reset and the high-side MOSFET is turned on again when FB voltage falls below the 0.76V.

AP65450 uses an adaptive on-time control scheme and does not have a dedicated in board oscillator. It runs with a pseudo-constant frequency of 650kHz by using the input voltage and output voltage to set the on-time one-shot timer. The on-time is inversely proportional to the input voltage and proportional to the output voltage. It can be calculated using the following equation:

$$T_{ON} = \frac{V_{OUT}}{V_{IN} \times f}$$

$V_{OUT}$  is the output voltage

$V_{IN}$  is the input voltage

$f$  is the switching frequency

After an ON-time period, the AP65450 goes into the OFF-time period. The OFF-time period length depends on VFB in most case. It will end when the FB voltage decreases and below 0.76V then the ON-time periods is triggered. If the OFF-time period is less than the minimum OFF time, the minimum OFF time will be applied, which is about 260ns typical.

### Power Save Mode

The AP65450 is designed with Power Save Mode (PSM) at light load conditions for high efficiency. The AP65450 automatically reduces the switching frequency and change the  $T_{on}$  time to  $T_{min-on}$  time during a light load condition to get high efficiency and low output ripple. As the output current decreases from heavy load condition, the inductor current decreases as well, eventually comes close to zero current, which is the boundary between CCM and DCM. The low side MOSFET is turned off when the inductor current reaches zero level. The load is provided only by output capacitor, when FB voltage is lower than 0.76V, the next cycle ON cycle is beginning. The on-time is the minimum on time that benefit for decreasing  $V_{OUT}$  ripple at light load condition. When the output current increases from light to heavy load, the switching frequency increases to keep output voltage. The transition point to light load operation can be calculated using the following equation:

$$I_{LOAD} = \frac{V_{IN} - V_{OUT}}{2L} \times T_{ON}$$

$T_{ON}$  is on-time



**Application Information** (continued)

**Setting the Output Voltage**

The output voltage can be adjusted from 1.000 to 5V using an external resistor divider. Table 1 shows a list of resistor selection for common output voltages. Resistor R1 is selected based on a design tradeoff between efficiency and output voltage accuracy. For high values of R1 there is less current consumption in the feedback network. However the trade off is output voltage accuracy due to the bias current in the error amplifier. R1 can be determined by the following equation:

$$R_1 = R_2 \cdot \left( \frac{V_{OUT}}{0.765} - 1 \right)$$

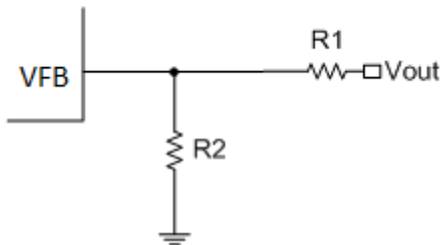


Figure 5. Feedback Divider Network

| Output Voltage (V) | R1 (kΩ) | R2 (kΩ) |
|--------------------|---------|---------|
| 1                  | 6.81    | 22.1    |
| 1.05               | 8.25    | 22.1    |
| 1.2                | 12.7    | 22.1    |
| 1.5                | 21.5    | 22.1    |
| 1.8                | 30.1    | 22.1    |
| 2.5                | 49.9    | 22.1    |
| 3.3                | 73.2    | 22.1    |
| 5                  | 124     | 22.1    |

Table 1. Resistor Selection for Common Output

**Inductor**

Calculating the inductor value is a critical factor in designing a buck converter. For most designs, the following equation can be used to calculate the inductor value;

$$L = \frac{V_{OUT} \cdot (V_{IN} - V_{OUT})}{V_{IN} \cdot \Delta I_L \cdot f_{SW}}$$

Where  $\Delta I_L$  is the inductor ripple current, and  $f_{SW}$  is the buck converter switching frequency.

Choose the inductor ripple current to be 30% of the maximum load current. The maximum inductor peak current is calculated from:

$$I_{L(MAX)} = I_{LOAD} + \frac{\Delta I_L}{2}$$

Peak current determines the required saturation current rating, which influences the size of the inductor. Saturating the inductor decreases the converter efficiency while increasing the temperatures of the inductor and the internal MOSFETs. Hence choosing an inductor with appropriate saturation current rating is important.

A 1μH to 3.3μH inductor with a DC current rating of at least 25% percent higher than the maximum load current is recommended for most applications. For highest efficiency, the inductor's DC resistance should be less than 100mΩ. Use a larger inductance for improved efficiency under light load conditions.

The phase boost can be achieved by adding an additional feed forward capacitor (C7) in parallel with R1.

| Output Voltage (V) | C7(pF) | L1(μH)  | C8+C9(μF) |
|--------------------|--------|---------|-----------|
| 1                  | —      | 1.0-1.5 | 22-68     |
| 1.05               | —      | 1.0-1.5 | 22-68     |
| 1.2                | —      | 1.0-1.5 | 22-68     |
| 1.5                | —      | 1.5     | 22-68     |
| 1.8                | 5-22   | 1.5     | 22-68     |
| 2.5                | 5-22   | 2.2     | 22-68     |
| 3.3                | 5-22   | 2.2     | 22-68     |
| 5                  | 5-22   | 3.3     | 22-68     |

Table 2. Recommended Component Selection

---

## Application Information (continued)

---

### Input Capacitor

The input capacitor reduces the surge current drawn from the input supply and the switching noise from the device. The input capacitor has to sustain the ripple current produced during the on time on the upper MOSFET. It must have a low ESR to minimize the losses.

The RMS current rating of the input capacitor is a critical parameter that must be higher than the RMS input current. As a rule of thumb, select an input capacitor which has an RMS rating that is greater than half of the maximum load current.

Due to large  $di/dt$  through the input capacitors, electrolytic or ceramics should be used. If a tantalum must be used, it must be surge protected. Otherwise, capacitor failure could occur. For most applications, greater than 10 $\mu$ F ceramic capacitor is sufficient.

### Output Capacitor

The output capacitor keeps the output voltage ripple small, ensures feedback loop stability and reduces the overshoot of the output voltage. The output capacitor is a basic component for the fast response of the power supply. In fact, during load transient, for the first few microseconds it supplies the current to the load. The converter recognizes the load transient and sets the duty cycle to maximum, but the current slope is limited by the inductor value.

Maximum capacitance required can be calculated from the following equation:

ESR of the output capacitor dominates the output voltage ripple. The amount of ripple can be calculated from the equation below:

$$V_{out\_capacitor} = \Delta I_{inductor} * ESR$$

An output capacitor with ample capacitance and low ESR is the best option. For most applications, a 22 $\mu$ F to 68 $\mu$ F ceramic capacitor will be sufficient.

$$C_o = \frac{L(I_{out} + \frac{\Delta I_{inductor}}{2})^2}{(\Delta V + V_{out})^2 - V_{out}^2}$$

Where  $\Delta V$  is the maximum output voltage overshoot.

### Bootstrap Capacitor

To ensure the proper operation, a ceramic capacitor must be connected between the BS and SW pin. A 0.1 $\mu$ F ceramic capacitor is sufficient.

### VREG5 Capacitor

To ensure the proper operation, a ceramic capacitor must be connected between the VREG5 and GND pin. A 1 $\mu$ F ceramic capacitor is sufficient.

**Application Information**

**PC Board Layout**

1. The AP65450 works at 4A load current, heat dissipation is a major concern in layout the PCB. A 2oz Copper in both top and bottom layer is recommended.
2. Provide sufficient vias in the thermal exposed pad for heat dissipate to the bottom layer.
3. Provide sufficient vias in the Output capacitor GND side to dissipate heat to the bottom layer.
4. Make the bottom layer under the device as GND layer for heat dissipation. The GND layer should be as large as possible to provide better thermal effect.
5. Make the Vin capacitors as close to the device as possible.
6. Make the VREG5 capacitor as close to the device as possible.
7. The thermal pad of the device should be soldered directly to the PCB exposed copper plane to work as a heatsink. The thermal vias in the exposed copper plane increase the heat transfer to the bottom layer.


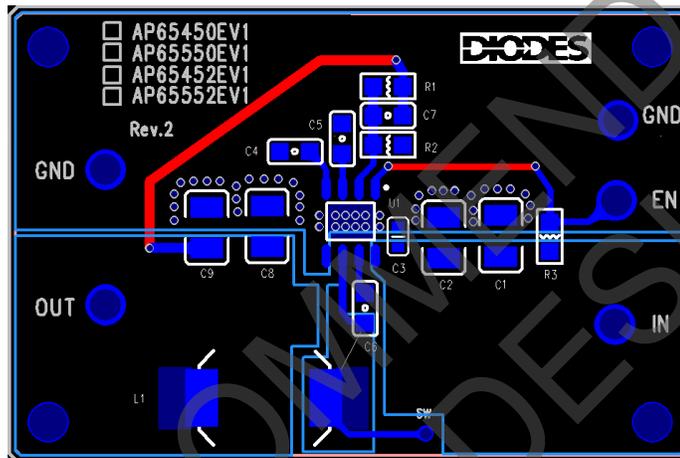



Figure 6. PC Board Layout

**Ordering Information**

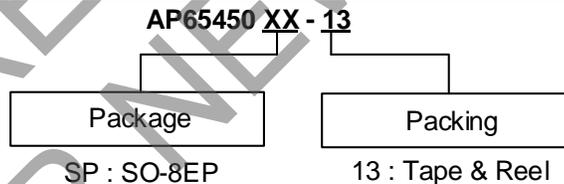

| Part Number  | Package Code | Part Marking | Identification Code | Tape and Reel |                    |
|--------------|--------------|--------------|---------------------|---------------|--------------------|
|              |              |              |                     | Quantity      | Part Number Suffix |
| AP65450SP-13 | SP           | SO-8EP       | AP65450             | 2500          | -13                |


**Marking Information**

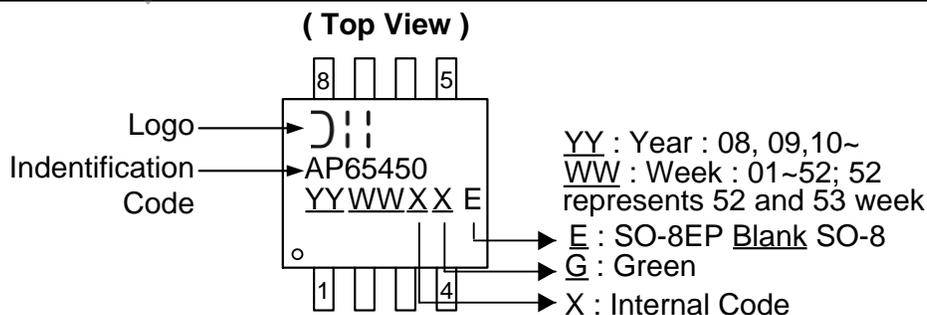

**Package Outline Dimensions** (All dimensions in mm.)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(1) Package Type: SO-8EP

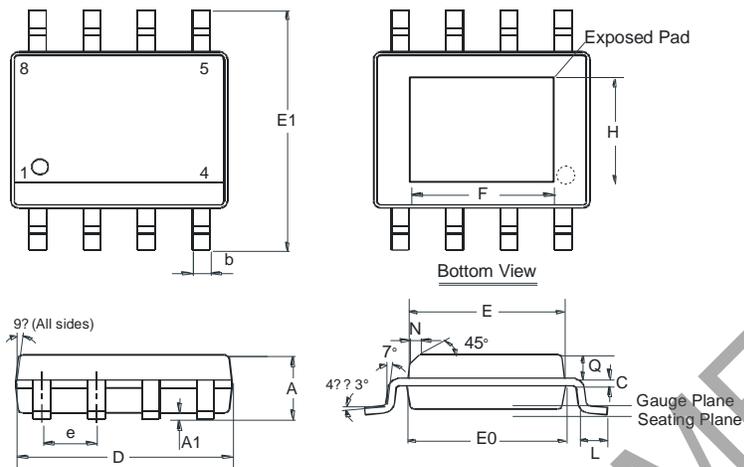


| SO-8EP (SOP-8L-EP)   |      |      |      |
|----------------------|------|------|------|
| Dim                  | Min  | Max  | Typ  |
| A                    | 1.40 | 1.50 | 1.45 |
| A1                   | 0.00 | 0.13 | -    |
| b                    | 0.30 | 0.50 | 0.40 |
| C                    | 0.15 | 0.25 | 0.20 |
| D                    | 4.85 | 4.95 | 4.90 |
| E                    | 3.80 | 3.90 | 3.85 |
| E0                   | 3.85 | 3.95 | 3.90 |
| E1                   | 5.90 | 6.10 | 6.00 |
| e                    | -    | -    | 1.27 |
| F                    | 2.75 | 3.35 | 3.05 |
| H                    | 2.11 | 2.71 | 2.41 |
| L                    | 0.62 | 0.82 | 0.72 |
| N                    | -    | -    | 0.35 |
| Q                    | 0.60 | 0.70 | 0.65 |
| All Dimensions in mm |      |      |      |

**Suggested Pad Layout**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(1) Package Type: SO-8EP

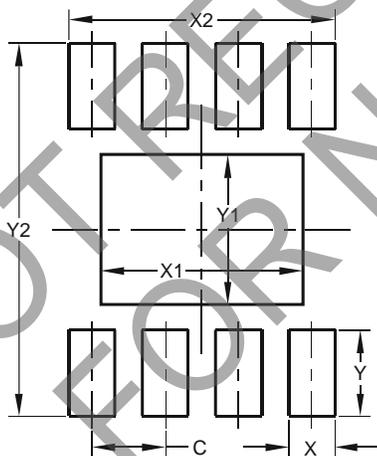

| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 1.270         |
| X          | 0.802         |
| X1         | 3.502         |
| X2         | 4.612         |
| Y          | 1.505         |
| Y1         | 2.613         |
| Y2         | 6.500         |

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)