

WiFi Cavity Bandpass Filter

Part Number: AB2067B624



Electrical specifications

Center Frequency: 2067.5 MHz

Bandwidth: 12 MHz

50 dB Bandwidth: 30 MHz max (12MHz

passband)

Passband Insertion Loss: 2.5 dB Max.

Passband Ripple: 0.5 dB MAX **VSWR (input and output):** 1.5:1 **Power Handling:** 10 Watts CW

Impedance: 50 Ohms

Mechanical

Mounting Method: Threaded Mounting Holes

Connector Type: SMA Female **Dimensions:** 10.07 x 1.5 x 0.76 in.


Environmental

Operating Temperature: -45 to +85 deg.C **Storage Temperature:** -55 to +95 deg.C

Shock: 20 G. 11ms

Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

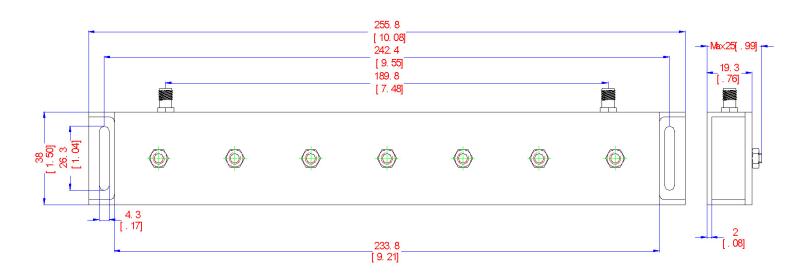

2 decimal places: +/-0.01 inches [+/- 0.3mm] 3 decimal places: +/- 0.005 inches [+/- 0.13mm]

Angles: +/- 1 Deg.

When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

70 Outwater Lane Phone: (973) 772-4242 Email: sales@anatechelectronics.com Web: www.anatechelectronics.com