

#### **Features**

- RoHS compliant\*
- Push-pull switch
- Linear and audio tapers
- PC board and bushing mount
- Splash seal
- Metal bushing and shaft

#### **Applications**

- Test and measurement equipment
- Communications equipment
- Medical diagnostic equipment
- Professional audio equipment

## (12.5 mm) Panel Control w/Push-Pull Switch

Electrical Characteristics <sup>1</sup>	
Standard Resistance Range	
Linear	1K to 500K ohms
Audio	
Total Resistance Tolerance	
B & D Tapers	±20 %
E & S Tapers	±10 %
Independent Linearity	±5 %
Absolute Minimum Resistance	
Effective Electrical Angle	270 ° ±5
Contact Resistance Variation	±2 %
Dielectric Withstanding Voltage (MIL-STD-202 – Method 301)	
Sea Level	1,500 VAC minimum
70,000	
Insulation Resistance1,	000 megohms minimum
Power Rating At 70 °C (Derate To 0 At 125 °C)	
(Voltage Limited By Power Dissipation or 350 VAC, Whichever Is Les	
Linear Tapers	
Audio Tapers	
Theoretical Resolution	Essentially infinite

#### **Additional Information**

Click these links for more information:











Audio Tapers	
Theoretical Resolution	Essentially infinite
Environmental Characteristics <sup>1</sup>	
Operating Temperature Range	+1 °C to +125 °C
	55 °C to +125 °C
Temperature Coefficient Over Storage Temperature	re Range±1,000 ppm/°C
	8 G
	±2 % maximum
•	±5 % maximum
Total Resistance Shift	+2 % maximum
	±5 % maximum
	±10 % TRS maximum
	±10 % TRS maximum
	±2 %
Moisture Resistance (MIL-STD-202, Method 103,	
	±10 % TRS
	±20 % TRS
IP Rating	
	IP64
Shaft/Bushing	IP65

### **Mechanical Characteristics**

Mechanical Angle	290 ° ±5 ′°
Torque	
Mounting (Torque on Bushing)	
	PC pin
Soldering Condition	
	Maximum tames and use 000 00 (750 05) for 0 accorde. No week proceeds to be used with no clear flow

Maximum temperature 399 °C (750 °F) for 3 seconds. No wash process to be used with no clean flux.

Part can be wave soldered at 260 °C (500 °F) for 5 seconds, no wash process with no clean flux. 


Hardware ...... Locking bushing versions are shipped with one additional locking nut (Bushing A: H-37-2 & H-38-2; Bushing C: H-37-1 & H-38-1)

<sup>&</sup>lt;sup>1</sup>Electrical specifications tested at 200 RPM, at room ambient: +25 °C nominal.


Initial Electrical Characteristics - Switch	
Switch Type	DPDT (Break before make)
	0.25 A @ 30 VDC
Dielectric Withstanding Voltage (MIL-STD-202, Method 301)	
Sea Level	1000 VAC minimum
Insulation Resistance	
Contact Resistance	
Actuating Stroke	0.41 cm (0.16 in.) maximum
Environmental Characteristics <sup>1</sup>	
Vibration	8 G
Contact Resistance	
Contact Bounce	0.1 milliseconds maximum
Shock	
Contact Resistance	
Contact Bounce	0.1 milliseconds maximum
Switch Life @ Rated Power	
Switch Actuating Force	0.45 kg (1.0 lb) minimum
Contact Resistance	100 milliohms maximum
Moisture Resistance (MIL-STD-202, Method 103, Condition B)	400 1111 1
Contact Resistance	
Insulation Resistance (After 24 Hours @ Room Temperature - 500 VDC)	100 megohms minimum


<sup>&</sup>lt;sup>1</sup>Electrical specifications tested at 200 RPM at room ambient: +25 °C nominal.

### **Switch Configurations (Shown in Pulled Position)**

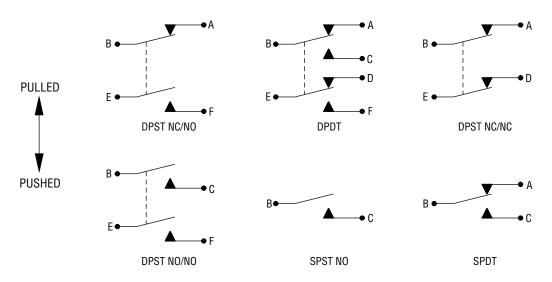


#### **Product Dimensions**

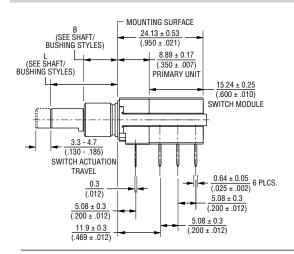





SHAFT FLAT SHOWN AT 50 % OF MECHANICAL TRAVEL.




SUGGESTED PCB LAYOUT

#### PACKAGE DIMENSIONS WITH FRONT AND REAR PCB MOUNTING BRACKET

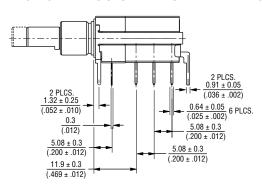




MM DIMENSIONS: (INCHES)



SUGGESTED PCB LAYOUT


#### **Anti-Rotation Lug**

#### (Style "A", 90° CW Shown)




FOR TOLERANCES SHOWN: .XX = 
$$\pm$$
  $\frac{.25}{(.010)}$   
.XXX =  $\pm$   $\frac{.13}{(.005)}$   
SHAFT DIMENSIONS  $\pm$   $\frac{.80}{(1/32)}$ 


#### **Terminal Layout**



#### **Electrical Schematic**





#### **Suggested Panel Layouts**



Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

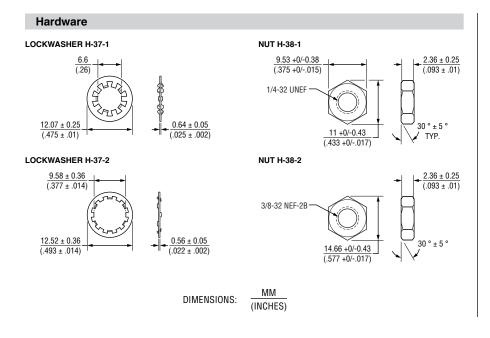




## BOURNS

#### **Shaft/Bushing Styles**




#### A Style Bushing

STD. LENGTH 'L'	
.750	(19.05)
.875	(22.23)



### C Style Bushing


-	-
STD. LE	NGTH 'L'
.750	(19.05)
.875	(22.23)



#### A Style Bushing -Flatted Shaft

STD. LE	NGTH 'L'
.750	(19.05)
.875	(22.23)

DIMENSIONS:  $\frac{MM}{(INCHES)}$ 

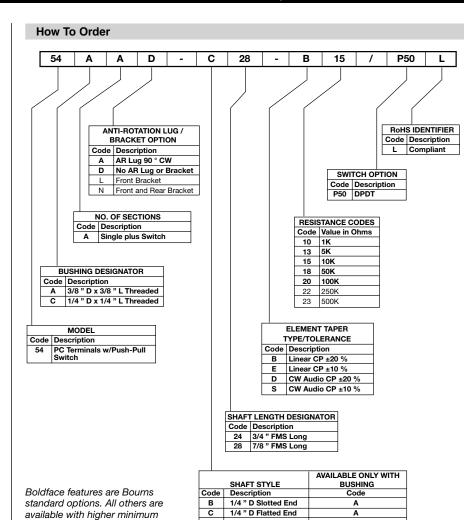

1/8 " D Slotted End

## BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

#### REV. 06/21

order quantities.

## **Legal Disclaimer Notice**

## BOURNS

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: http://www.bourns.com/legal/disclaimers-terms-and-policies

PDF: http://www.bourns.com/docs/Legal/disclaimer.pdf